



# Monarch PRODUCTS COMPANY

Reply to:

## SEPTIC TANKS

**No. 1450 Septic Tank** (2 piece) 1250 gallon working capacity

Weight per each section ----- 4000 lbs.

Total tank weight ----- 8000 lbs.

Overall measurements: 59" wide x 96" long x 78" high

Measurement to bottom of inlet hole - 65"

**No. 1250 Septic Tank** (2 piece) 1000 gallon working capacity

Weight per each section ----- 3500 lbs.

Total tank weight ----- 7000 lbs.

Overall measurements: 51" wide x 96" long x 78" high

Measurement to bottom of inlet hole - 65"

**No. 500 Septic Tank** ( 2piece) 300 gallon working capacity

Weight of box portion ----- 2580 lbs.

Weight of cover ----- 850 lbs.

Total weight of tank ----- 3430 lbs.

Overall measurements: 39" wide x 95" long x 36" high

Measurement to bottom of inlet hole - 26"





*Monarch* PRODUCTS COMPANY

Reply to:

**CISTERNS**

**1250 Gallon Cistern - (2 piece)**

Weight per section - each ----- 3500 lbs.  
Total Cistern weight ----- 7000 lbs.

Overall measurements: 51" wide x 96" long x 78" high

A cistern has a 24" manhole opening. It has one 4" vent opening and two 1 1/4" outlet couplings (one at each end of the cistern near the bottom). The vent pipe is 4" PVC, 5 foot in length. The vent pipe **MUST** be installed in the vent opening. Manhole extensions are available to bring the manhole to grade.

Included in the basic price is: one plug, one male adapter and the vent piping.

1300 - 15th STREET NW • BOX 966  
PHONE 701-852-0307 • FAX 701-852-8891  
MINOT, NORTH DAKOTA 58702



300 MANDAN AVENUE • BOX 745  
PHONE 701-663-6481 • FAX 701-663-6605  
MANDAN, NORTH DAKOTA 58554

1-800-932-8905



# Monarch PRODUCTS COMPANY

Reply to:

## SEWER SYSTEM & ACCESSORIES:

- No. 20 Dome . . . . . (275 lbs)**  
25 1/2" O.D., 16" H -- with 2, 3, or 4 - 4" diameter holes.
- No. 48 Nodak Holding Chamber . . . . . (3000)**  
54" x 54" O.D. x 46" High.  
48" x 48" I.D. x 42" High.  
Comes with 24" access hole. Available with solid cover or cover with 12" hole. Sidewall has one 4" hole.
- No. 24 Nodak Holding Chamber . . . . . (1075)**  
30" O.D., 24" I.D., 36" H, solid bottom. Available with solid cover or cover with 4" or 12" hole. Sidewall has one 4" hole.
- 12" Extension . . . . . (275)**  
30" O.D., 24" I.D., 12" effective height
- 24" Extension . . . . . (545)**  
30" O.D., 24" I.D., 24" effective height
- 36" Extension . . . . . (818)**  
30" O.D., 24" I.D., 36" effective height
- Cover for cistern or holding chamber . . . . . (145)**  
Fits all 30" O.D. extensions, available in solid, 4" or 12" hole. Outside diameter is 30".
- 12" PVC Pipe**  
Used for septic tank or holding chamber risers. Sold in full 14' lengths or cut to length.
- 15" PVC Pipe**  
Used for septic tank or holding chamber risers. Sold in full 14' lengths or cut to length.
- Conversion Rings . . . 18 x 18 x 2 1/2 - 12" hole for PVC . . (45)**  
. . . 32 x 32 x 3 - 12" hole for PVC . . (225)
- Riser Plugs . . . SHORT, for below grade ONLY . . . . . (26)**  
. . . LONG, for at grade installation . . . . . (75)  
. . . 15" Riser Cover . . . . . (75)
- Sealer Tape 1/4" x 2" x 25' roll**





# Monarch PRODUCTS COMPANY

Reply to:

4" PVC Pipe....ASTM 3034 - SDR 35.....per 100'  
10' lengths, one belled end, perf or solid

4" PVC Pipe....Schedule 40.....per 100'  
10' lengths, one belled end, **SOLID only**

6" PVC Pipe....SDR 35.....per 100'  
10" lengths, one belled end, **SOLID only**

PVC FITTINGS.....4" - 3034.....4" - Sch. 40.....6" - 3034



1/16 bend



1/8 bend st. ell



1/8 bend



1/4 bend



1/4 bend st. ell



Sanitary tee



Tee



Wye



MIPT plug



Cleanout Adapter



Coupling



Cross



Adptr. to 4" DWV



Adptr. to 3" DWV




Cap





# Monarch PRODUCTS COMPANY

Reply to:



### QUICK and EASY "NODAK" PIPE RISER PACKAGE

- No. 52...5' long, 2' short
- No. 63...6' long, 3' short
- No. 74...7' long, 4' short
- No. 85...8' long, 5' short



1½" x 1½" Male Adapter

1½" PVC Union (O-Ring type)

1½" PVC 90° E11

1½" PVC 90° Street E11

1½" PVC Coupling

1½" PVC Sch 40 DWV Pipe...per ft.

1½" x 1¼" PVC Threaded Bushing

1½" x 1¼" Reducing Male Adapter

1300 - 15th STREET NW • BOX 966  
PHONE 701-852-0307 • FAX 701-852-8891  
MINOT, NORTH DAKOTA 58702



300 MANDAN AVENUE • BOX 745  
PHONE 701-663-6481 • FAX 701-663-6605  
MANDAN, NORTH DAKOTA 58554


1-800-932-8905



Reply to:

## EFFLUENT PUMPS - Features and Performance

### OSP50

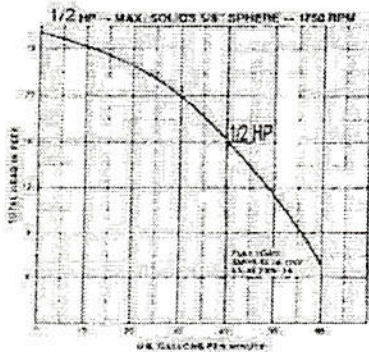

- Available with wide angle or diaphragm switch
- Completely submersible.
- No suction screens to clean.
- Oil-filled, double ball bearing motor with built-in overload protection.
- Non-clog bronze impeller.
- Rugged cast iron construction
- 1 1/2" NPT discharge



### W-A1 & SW33

SW33



- For sump and effluent use.
- Supplied with wide-angle "piggyback" float switches.
- Heavy-duty, 115V oil-filled motor with thermal overload protection.
- Rugged cast iron construction.
- Non-clog vortex impeller.
- Long life lower ball bearing.
- Sintered top sleeve bearing.
- Carbon and ceramic mechanical shaft seal.
- 1 1/2" NPT discharge
- 20' Replaceable Power Cord
- UL listed sump pump

