



The VELUX Dynamic Dome

A Revolution in Commercial Skylights

VELUX has just revolutionized the commercial skylight market with the introduction of our new VELUX Dynamic Dome, an innovative product that balances the structural demands of industry professionals with an architecturally progressive design.


Dynamic Dome Features

Smooth outer dome provides more light than prismatic outer dome (+20%)



White prismatic inner dome achieves 100% diffusion/haze


Unmatched architectural elegance

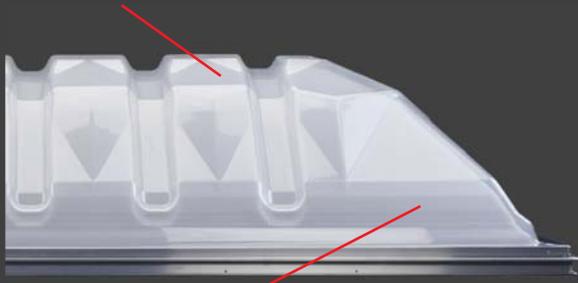

Sidewall of the dome is engineered to match the sun angles of morning/afternoon hours to improve light transmittance

Advanced Water Management

Unique one-piece inner frame evacuates all water/condensation harmlessly to the exterior




- Encapsulating thermoplastic inner frame is 100% thermally broken and provides a secure seal to the curb
- Dry installation; No caulk or curb tape needed
- One-piece inner frame creates an impenetrable water barrier

Competitive Marketing Pricing


- Compact nesting creates the ability to ship more skylights per truckload, allowing for compounded savings in freight
- New manufacturing equipment allows high capacity production at lower costs

Dynamic Dome
standard sizes

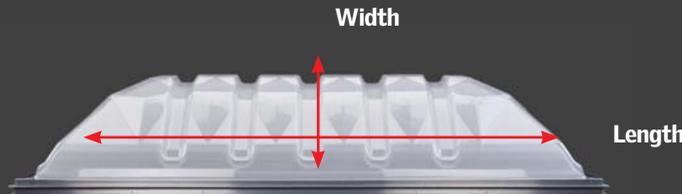

Sizes	24" width			36" width			48" width			60" width			72" width		
	Model	Fits Inside Curb	Delivery												
36" length				3636	36" x 36"										
48" length	2448	24" x 48"					4848	48" x 48"							
60" length				3660	36" x 60"		4860	48" x 60"		6060	60" x 60"		7272	72" x 72"	
72" length				3672	36" x 72"		4872	48" x 72"		6072	60" x 72"				
96" length	2496	24" x 96"		3696	36" x 96"		4896	48" x 96"		6096	60" x 96"				
120" length	2412	24" x 120"		3612	36" x 120"		4812	48" x 120"		6012	60" x 120"				

Custom sizes also available in other VELUX dome styles



 stocked for quick shipment
 14 business days lead-time


Dynamic Dome standard options

Standard Options	Outer Dome Material	Inner Dome Material
LuxGuard	UV Guard Coextruded Poly Smooth Clear	Poly Prismatic White
LuxGuard Plus	UV Guard Coextruded Poly Smooth Clear	Poly Prismatic White
Impact Modified Acrylic	100% Impact Mod Smooth Clear	50% Impact Mod Prismatic White
Basic Acrylic	Smooth Acrylic Clear	Smooth Acrylic White


15-year WARRANTY
on LuxGuard options including breakage
hail breakage up to 2" in diameter

Many other dome configurations available (clear/clear, white/clear, etc.)

Dynamic Dome curbs



Curb: CCA6
Insulation: Field Insulated – Single Wall
Material: Galvanized Steel
Avail Height Options: 9", 12", 16", 18"




Curb: CCA3
Insulation: Factory Insulated – Double Wall
Material: Galvanized Steel
Avail Height Options: 9", 12", 16", 18"




Curb: CCAM
Insulation: Factory Insulated – Double Wall
Material: Aluminum
Avail Height Options: 9", 12", 16"

Dynamic Dome fall protection



Exterior safety screen



Interior safety screen

WARNING!
RISK OF FALLING THROUGH SKYLIGHT