


This product is made in accordance with the following specifications:


ASTM D2729

ASTM D1784

PVC drain, waste, and vent pipe shall be made in accordance with ASTM D2729 from a compound conforming to a minimum cell classification of 12454 as defined by ASTM D1784. Pipe shall be supplied in lengths of 10 feet or 20 feet as required. When required, the pipe shall be perforated with two rows of ½” diameter holes every 5 inches. Rows shall be parallel to the pipe and 120 degrees apart.

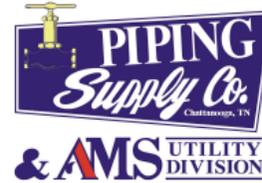


ASTM D2729 Sewer & Drain Pipe

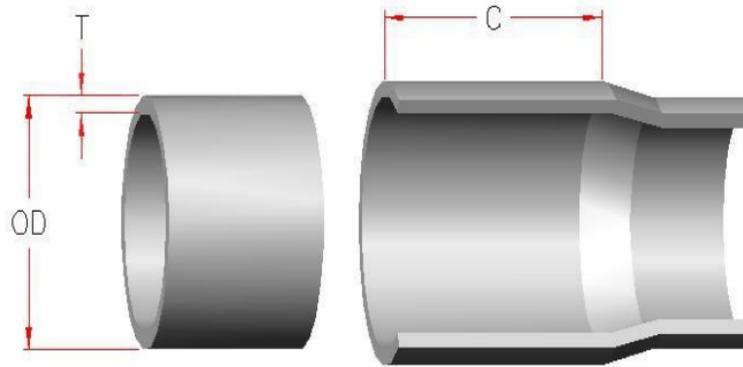

NOMINAL PIPE SIZE	OUTSIDE DIA. – NOM. (OD)	APPROX. BELL DEPTH (C)	(T)
3"	3.250	1.50	.070
4"	4.215	1.75	.075
6"	6.275	3.00	.100

Perforated pipe is supplied with 2 rows of ½" diameter holes every 5 inches. Rows are parallel to the axis of the pipe and are 120° apart. Alternate hole spacing and diameters are available.

Loading Data for ASTM D2729 Sewer & Drain Pipe

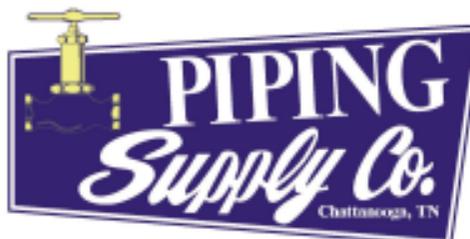

NOMINAL PIPE SIZE	APPROX. WEIGHT/FT.	OUTSIDE DIAMETER	JOINTS PER BUNDLE	FEET PER BUNDLE	FEET PER TRUCKLOAD
3"	.46	3.250	88	880	28,160
4"	.65	4.215	66	660	21,120
6"	1.29	6.275	33	330	7,920