

ENTRE/MATIC

HURRICANE RATED



Amarr® Residential Garage Doors

www.amarr.com

STYLISH STRENGTH

With Amarr garage doors, you don't have to compromise style for hurricane preparedness. Almost all Amarr residential garage doors are available with a wind load reinforcement system that meets or exceeds building code requirements in your area.



AMARR HURRICANE RATED GARAGE DOORS

When installed according to our instructions and local building codes, Amarr hurricane rated garage doors:

- Withstand rapid cyclic pressure and static load forces up to 245 mph.¹
- Resist large missile impact at 50' per second (35 mph).²
- May qualify for discounts on your homeowner's insurance.³

¹ Exposure B with a mean roof height less than 30' based on ASCE7-10. (57/-67 PSF)


² Option available on select models only.

³ Check with your insurance provider for details.

Meet or exceed these building codes:

- Florida Building Code (FBC)
- International Code Council (ICC)
- Texas Department of Insurance (TDI)
- High-Velocity Hurricane Zone (HVHZ)
(Miami – Dade and Broward Counties)

United States East Coast & Gulf Wind Zones

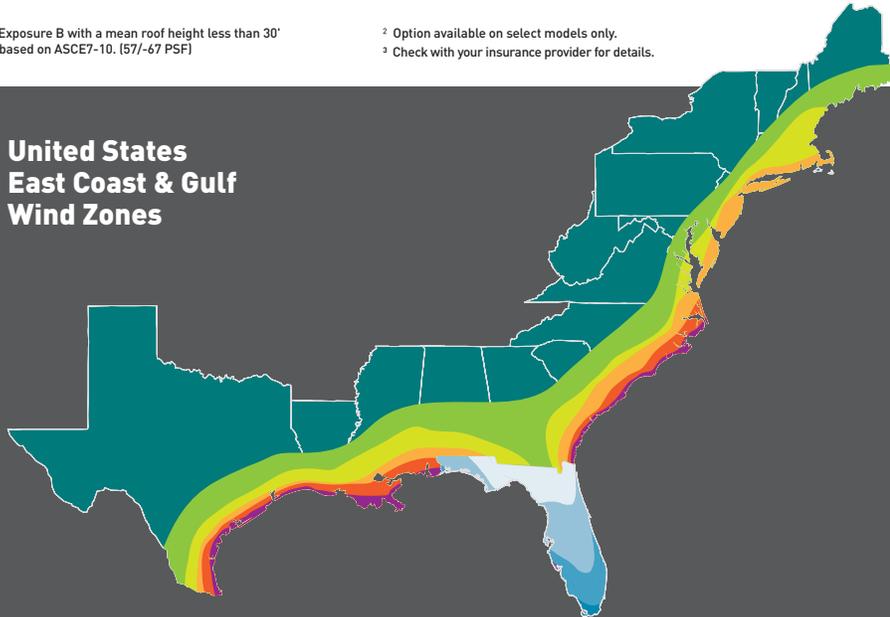

Based on ASCE7-05

90 – 100 mph

100 – 110 mph

110 – 120 mph

120 – 130 mph

130 – 150 mph

Based on ASCE7-10

115 – 130 mph

130 – 150 mph

150 – 170 mph

170+ mph

Wind load engineering up close.

Amarr wind load approved garage doors use a variety of reinforcement materials, including Struts and R-Trusses which are engineered to meet specific building code requirements.

Impact garage doors.


Select Amarr wind load approved garage doors are large missile impact tested using a 9.5 lb 2x4 board flying at 50' per second (35 mph).

Impact glass.

Available in short and long panel windows on select Amarr garage doors; impact glass may shatter, but remains intact despite the force.

Understanding the requirements for your neighborhood.

Local government regulations for wind load requirements can vary from one location to another due to door size, the door's location on the structure, and localized wind zones, among other factors. The homeowner is responsible to make sure their garage door meets local building codes.

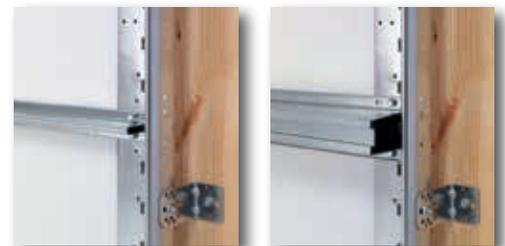

Strut 2" or 3"

R-Truss 3-5/8", 4-1/2", 5"



Impact Door Testing



Impact Glass

COLLECTIONS VARIETY



STEEL CARRIAGE HOUSE

- 6 Amarr Carriage Court
- 7 Amarr Classica®
- 8 Amarr Hillcrest
- 9 Amarr Oak Summit®
- 10 Amarr Designer's Choice

STEEL TRADITIONAL

- 10 Amarr Olympus
- 11 Amarr Heritage™
- 12 Amarr Lincoln
- 13 Amarr Stratford®

WOOD

- 15 Amarr by Design

ALUMINUM FULL VIEW

- 16 Amarr Vista

VINYL

- 17 Amarr Coastal



CONSTRUCTION

STEEL

1000

Single-Layer: Steel

Amarr Classica, Hillcrest, Oak Summit, Heritage, Lincoln & Stratford

- Heavy-duty Exterior Steel
- Durable, Reliable, Low Maintenance



2000

Double-Layer: Steel + Insulation

Amarr Classica, Hillcrest, Oak Summit, Heritage, Lincoln & Stratford

- Heavy-duty Exterior Steel
- Durable, Reliable, Low Maintenance
- Environmentally Safe Polystyrene Thermal Insulation with Vinyl Backing
- Energy Efficient
- Quiet Operation



3000

Triple-Layer: Steel + Insulation + Steel

Amarr Classica, Hillcrest, Oak Summit, Olympus, Designer's Choice, Heritage, Lincoln & Stratford

- Heavy-duty Exterior and Interior Steel
- Durable, Reliable, Low Maintenance
- Environmentally Safe Polystyrene or Polyurethane Thermal Insulation
- Superior Energy Efficiency
- Extra Quiet Operation




* For True White Bead Board only. † For True White Short Panel only.
 ** For all panels and colors except True White Bead Board. ‡ For all panels and colors except True White Short Panel.

4000

Four-Layer: Overlay + Steel + Insulation + Steel

Amarr Carriage Court

- Heavy-duty Exterior and Interior Steel
- Durable, Reliable, Low Maintenance
- Environmentally Safe Polystyrene Thermal Insulation
- Energy Efficient
- Extra Quiet Operation



WOOD

Wood + Insulation + Wood

Amarr by Design

- Custom, Handcrafted Carriage House Designs
- Multiple Wood Options
- Paint or Stain Grade Wood
- Environmentally Safe Polystyrene Thermal Insulation
- Energy Efficient




ALUMINUM

Aluminum + Glass

Amarr Vista

- 2" thick extruded commercial-grade aluminum frame for durability
- Corrosion resistant aluminum
- ClearView Strut System strengthens door without restricting view



VINYL

Vinyl + Insulation + ABS

Amarr Coastal

- Solid Vinyl Face for Rust and Dent Resistance
- Solid Vinyl Edges to Seal Out Weather
- Machine-Carved V-Grooves for Precise Design Detail
- Environmentally Safe Polystyrene Insulation with laminated ABS thermoplastic backing
- Energy Efficient






Tanglewood design with Closed Arch in Wicker Tan/White with Versailles decorative hardware

AMARR CARRIAGE COURT


Distinctly defined. The Amarr Carriage Court collection adds increased curb appeal to your home. Built with durable composite overlay trim and insulated steel-backed sections, these garage doors provide energy efficiency, noise reduction and innovative design to your home.

DESIGNS

AVAILABLE WITH WINDOWS

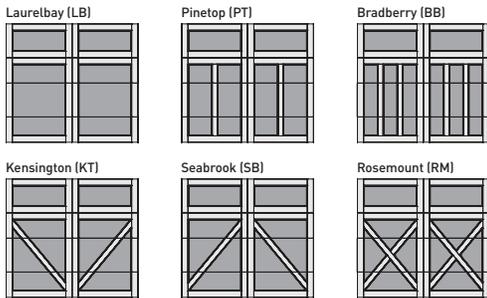

NOT AVAILABLE WITH WINDOWS

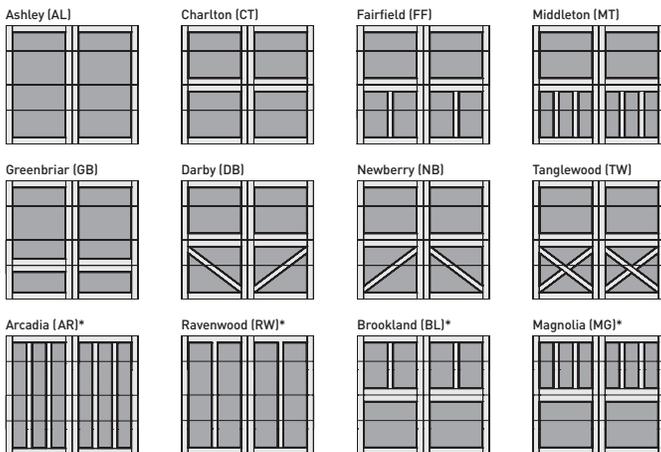

*Closed Square Only

CC4000
Four-Layer:
Overlay + Steel + Insulation + Steel

CC4000
R-VALUE
6.48

Decorative Windows & Hardware

Optional decorative windows & hardware add character to your door. See page 14 for all window and decorative hardware options.

Rosemont with Closed Square (RM104)



Laurelbay with Clear Square (LB115)




Bradberry with 3 Lite Arch (BB110)



Charlton with Closed Arch (CT105)



Darby with Closed Square (DB104)



COLORS

Actual paint colors may vary from samples shown. Amarr steel doors are pre-painted; for custom colors, exterior latex paint must be used.



Door, window frames, and overlay can be painted using 100% acrylic exterior latex paint with a Light Reflective Value (LRV) of 8 or higher. Contact paint manufacturer for LRV ratings.

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635 lbs.	Door Width Up To	Wind Load Approved for Wind Speeds Ranging MPH ¹ /MPH ² (PSF Design Pressures)	Impact Resistant	Glass Available	
				Standard	Impact
Amarr Carriage Court CC4000 	9'	90 – 130 mph 116 – 168 mph (12.7/-14.9) – (26.4/-31.1)	Yes ³	Yes ³	No
	16'	90 – 130 mph 116 – 168 mph (12.1/-13.8) – (25.3/-28.7)	Yes ³	Yes ³	No
	18'	90 – 130 mph 116 – 168 mph (12.0/-13.6) – (25.1/-28.4)	Yes ³	Yes ³	No
Miami-Dade		N/A	N/A	N/A	N/A

¹ Based on ASCE7-05

² Based on ASCE7-10

³ Option available on select models.




Northampton design in Walnut with Versailles decorative handles and hinges

AMARR CLASSICA

Looks can be deceiving. From a distance, you see wood. Up close, it's sturdy, durable, low-maintenance steel. Attractive and structurally strong carriage house styles that go up and down like traditional garage doors. Three-section tall designs, instead of four, help deliver a more authentic carriage house look. Deception never looked so good.

DESIGNS

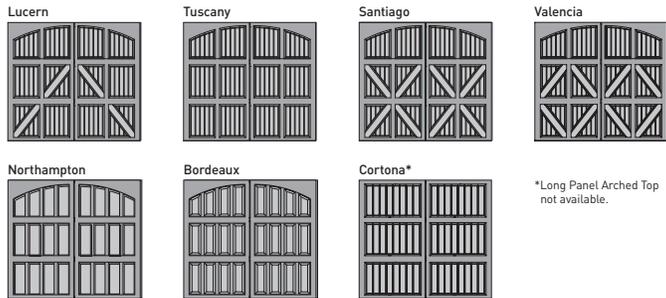

CL1000 Single-Layer: Steel	CL2000 Double-Layer: Steel + Insulation	CL3000 Triple-Layer: Steel + Insulation + Steel	CL3000 R-VALUE 13.35
---	--	--	--

Decorative Windows & Hardware
Optional decorative windows & hardware add character to your door. See page 14 for all window and decorative hardware options.

COLORS

Actual paint colors may vary from samples shown. Amarr steel doors are pre-painted; for custom colors, exterior latex paint must be used.



*Price upcharge applies

TWO-TONE PAINT OPTIONS*

PANEL	BASE DOOR					
	TRUE WHITE	ALMOND	WICKER TAN	SANDTONE	TERRATONE	DARK BROWN
TRUE WHITE	True White	Almond	Wicker Tan	Sandtone	Terratone	Dark Brown
ALMOND	True White	Almond	Wicker Tan	Sandtone	Terratone	Dark Brown
WICKER TAN	True White	Almond	Wicker Tan	Sandtone	Terratone	Dark Brown
SANDTONE	True White	Almond	Wicker Tan	Sandtone	Terratone	Dark Brown
TERRATONE	True White	Almond	Wicker Tan	Sandtone	Terratone	Dark Brown
DARK BROWN	True White	Almond	Wicker Tan	Sandtone	Terratone	Dark Brown
HUNTER GREEN	True White	Almond	Wicker Tan	Sandtone	Terratone	Dark Brown
GRAY	True White	Almond	Wicker Tan	Sandtone	Terratone	Dark Brown

*Price upcharge applies

Lucern with Closed Square (L2)



Tuscany with Closed Arch (T1)




Bordeaux with Closed Arch (B1)



Cortona with Seine Windows (C8)



Santiago with Closed Arch (S1)



WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635 lbs.	Door Width Up To	Wind Load Approved for Wind Speeds Ranging MPH/MPH ² (PSF Design Pressures)	Impact Resistant	Glass Available	
				Standard	Impact
Amarr Classica CL3000 Lifetime Limited Warranty	9'	90 – 151 ¹ mph 116 – 195⁴ mph (12.8/-15.1) – (35.6/-41.9)	No	Yes	Yes ³
	16'	90 – 151 ¹ mph 116 – 194⁴ mph (12.2/-13.8) – (33.7/-38.1)	Yes	Yes	Yes ³
	18'	90 – 151 ¹ mph 116 – 194⁴ mph (12.2/-13.8) – (33.7/-38.1)	No	Yes	Yes ³
Miami-Dade		N/A	N/A	N/A	N/A
Amarr Classica CL1000 and CL2000 Lifetime Limited Warranty	9'	110 – 180 mph 142 – 232 mph (19.1/-22.6) – (51.1/-60.3)	No	Yes ³	No
	16'	90 – 175 mph 116 – 225 mph (12.2/-13.9) – (45.9/-52.1)	Yes ³	Yes ³	No
	18'	90 – 160 mph 116 – 205 mph (12.2/-13.8) – (38/-43.0)	Yes ³	Yes ³	Yes ³
Miami-Dade	9'	185 mph 235 mph (54.4/-62.0)	Yes	No	No
	16'	169 mph 218 mph (43.4/-49.3)	Yes	No	No

¹ Based on ASCE7-05

² Based on ASCE7-10

³ Option available on select models. Impact glass available August 2016.

⁴ 151 mph 194/195 mph available August 2016.



Raised design with Arched Thames DecraTrim windows in Wicker Tan with Alpine handles


AMARR HILLCREST

Value is a beautiful thing. With the Amarr Hillcrest collection you get more than a custom carriage house look. You get exceptional style and durability with conventional hardware at a competitive price.

Bead Board design with Wagon Wheel DecraTrim in True White with Blue Ridge decorative handles and hinges



Long Bead Board with Stockton DecraTrim (LPBB20)



Bead Board with Cascade DecraTrim (BB23)



Raised with Waterford DecraTrim (RS25)




Recessed with Thames DecraTrim (RE30)



Raised (RS)



DESIGNS

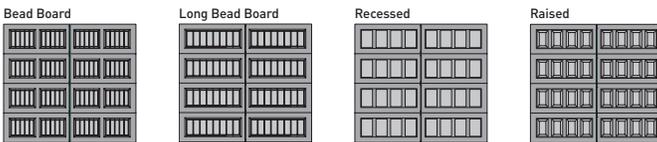

HI1000
Single-Layer:
Steel

HI2000
Double-Layer:
Steel + Insulation

HI3000
Triple-Layer:
Steel + Insulation + Steel

HI3000
R-VALUE
9.05

Decorative Windows & Hardware

Choose DecraTrim window inserts to coordinate with your home's design along with optional decorative hardware.

See page 14 for all window and decorative hardware options.

COLORS

Actual paint colors may vary from samples shown. Amarr steel doors are pre-painted; for custom colors, exterior latex paint must be used.



*Price upcharge applies

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635 lbs.	Door Width Up To	Wind Load Approved for Wind Speeds Ranging MPH/MPH ² (PSF Design Pressures)	Impact Resistant	Glass Available	
				Standard	Impact
Amarr Hillcrest HI3000 Lifetime Limited Warranty	9'	90 – 155 mph 123 – 200 mph (14.3/-16.9) – (38.0/-45.0)	Yes ³	LP ³	LP ³
	16'	90 – 155 mph 123 – 200 mph (12.3/-13.9) – (36.4/-41.4)	Yes ³	LP ³	LP ³
	18'	90 – 155 mph 123 – 200 mph (12.2/-13.8) – (36.1/-40.8)	Yes ³	LP ³	LP ³
Miami-Dade		N/A	N/A	N/A	N/A
Amarr Hillcrest HI1000 and HI2000 15-Year Limited Warranty 25-Year Limited Warranty	9'	90 – 130 mph 116 – 168 mph (12.8/-15.1) – (26.7/-31.6)	No	SP, LP	No
	16'	90 – 130 mph 116 – 168 mph (12.3/-13.9) – (25.6/-29.1)	No	SP, LP	No
	18'	90 – 130 mph 116 – 168 mph (12.2/-13.8) – (25.4/-28.0)	No	SP	No
Miami-Dade		N/A	N/A	N/A	N/A

¹ Based on ASCE7-05 ² Based on ASCE7-10 ³ Option available on select models.



Long Bead Board design with Moonlite DecraTrim in True White with Blue Ridge decorative handles and hinges

AMARR OAK SUMMIT

Self-expression shouldn't cost a fortune. With the Amarr Oak Summit collection, it won't. These durable steel doors offer an attractive carriage house look. Choose from a variety of door colors, decorative hardware, and window accents. Customize your look with our most affordable carriage house door.

Bead Board design in Golden Oak with Blue Ridge decorative handles and hinges



Raised with Cascade DecraTrim (RS23)



Bead Board with Prairie DecraTrim (BB21)



Long Bead Board with Stockton DecraTrim (LPBB20)




Recessed with Arched Thames DecraTrim (RE31)



Recessed (RE)



DESIGNS

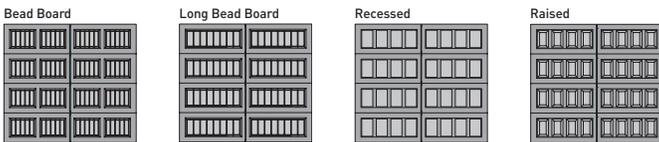

OS1000
OS1200

Single-Layer:
Steel

OS2000
OS2200

Single-Layer:
Steel + Insulation

OS3000
OS3200

Triple-Layer:
Steel + Insulation + Steel

OS3000
R-VALUE
6.48

OS3200
R-VALUE
9.05

Decorative Windows & Hardware


Give your door a unique carriage house look with a variety of decorative window and hardware options.

See page 14 for all window and decorative hardware options.

COLORS

Actual paint colors may vary from samples shown.

Amarr steel doors are pre-painted; for custom colors, exterior latex paint must be used.



OS1000 and OS2000 Short Panel (SP) impact windows and panel designs are slightly misaligned by no more than 1.594"; returns and replacements not accepted. To see detailed drawing, contact engineeringdept@amarr.com

*Not available in Amarr Oak Summit OS1200/OS2200/OS3200 (2" 24-ga)
†Available in Amarr Oak Summit OS3000 only (1-3/8" 27-ga)
‡Price upcharge applies

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635 lbs.	Door Width Up To	Wind Load Approved for Wind Speeds Ranging MPH ¹ /MPH ² (PSF Design Pressures)	Impact Resistant	Glass Available	
				Standard	Impact
Amarr Oak Summit OS3000 1-3/8" 27-ga	9'	90 – 155 mph 120 – 200 mph (14.3/-16.9) – (38.0/-45.0)	Yes ³	LP ³	LP ³
	16'	90 – 155 mph 117 – 200 mph (14.1/-14.1) – (36.4/-41.4)	Yes ³	LP ³	LP ³
	18'	90 – 155 mph 116 – 200 mph (12.2/-13.8) – (37.0/-40.6)	Yes ³	LP ³	LP ³
Amarr Oak Summit OS3200 2" 24-ga	9'	189 mph 245 mph (57.0/-67.5)	Yes	Yes	LP
	16'	175 mph 224 mph (48.0/-52.0)	Yes	Yes	LP ³
	18'	165 mph 212 mph (42.0/-46.0)	Yes	Yes	LP
Amarr Oak Summit OS1000 and OS2000 2" 25-ga	9'	90 – 169 mph 123 – 214 mph (14.3/-16.9) – (45.3/-51.2)	Yes ³	LP ³	SP ³
	16'	90 – 156 ⁴ mph 116 – 202 mph (12.3/-13.9) – (38.0/-42.0)	Yes ³	LP ³	SP ³
	18'	90 – 155 mph 116 – 200 mph (12.2/-13.8) – (37.0/-40.6)	Yes ³	LP ³	SP ³
Amarr Oak Summit OS1200 and OS2200 2" 24-ga	9'	169 – 189 mph 214 – 244 mph (45.3/-51.2) – (57.0/-67.0)	Yes	No	SP ³
	16'	156 – 185 mph 202 – 239 mph (38.0/-42.0) – (51.9/-58.9)	Yes	No	SP ³
	18'	165 – 185 mph 212 – 232 mph (42.0/-46.0) – (48.6/-55.0)	Yes	No	SP ³

¹ Based on ASCE7-05 ² Based on ASCE7-10 ³ Option available on select models ⁴ 156 mph has Miami-Dade NOA

STEEL



Bead Board design in True White with Blue Ridge handles

STEEL



Short Panel design in True White

AMARR DESIGNER'S CHOICE

Energy efficiency makes the Amarr Designer's Choice a popular choice for garage doors. With a high R-value of 19.40[†], this door gives you the ultimate in energy efficiency and quiet operation.


Bead Board design in True White with Blue Ridge handles and hinges



Short Panel design in True White



DESIGNS

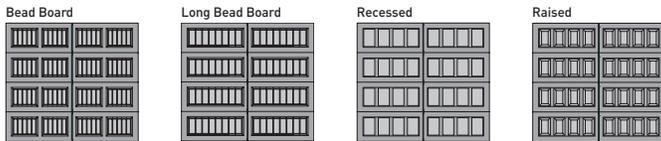

DC3200

Triple-Layer:
Steel + Insulation + Steel

R-VALUE
19.40[†]

[†]For True White Bead Board only. 13.35 R-value for all other panels and colors.

Decorative Hardware

Choose decorative hardware to best coordinate with your home. See page 14 for hardware options.

COLORS

Actual paint colors may vary from samples shown. Amarr steel doors are pre-painted; for custom colors, exterior latex paint must be used.



*Price upcharge applies

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635 lbs.	Door Width Up To	Wind Load Approved for Wind Speeds Ranging MPH/MPH ² (PSF Design Pressures)	Impact Resistant	Glass Available	
				Standard	Impact
Amarr Designer's Choice DC3200 	9'	90 – 155 mph 116 – 200 mph (12.8/-15.1) – (38.0/-44.9)	Yes ³	No	No
	16'	90 – 155 mph 116 – 200 mph (12.3/-13.9) – (37.0/-41.0)	Yes ³	No	No
	18'	90 – 155 mph 116 – 200 mph (12.3/-13.9) – (37.0/-40.6)	Yes ³	No	No
Miami-Dade		N/A	N/A	N/A	N/A

¹ Based on ASCE7-05

² Based on ASCE7-10

³ Option available on select models.


AMARR OLYMPUS

Energy efficiency makes Amarr Olympus doors popular models. With a high R-value of 19.40[†], these doors give you the ultimate in energy efficiency and quiet operation.

Short Panel design in True White



DESIGNS



OL3200

Triple-Layer:
Steel + Insulation + Steel

R-VALUE
19.40[†]

[†]For True White Short Panel only. 13.35 R-value for all other panels and colors.

COLORS

Actual paint colors may vary from samples shown. Amarr steel doors are pre-painted; for custom colors, exterior latex paint must be used.



*Price upcharge applies

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635 lbs.	Door Width Up To	Wind Load Approved for Wind Speeds Ranging MPH/MPH ² (PSF Design Pressures)	Impact Resistant	Glass Available	
				Standard	Impact
Amarr Olympus OL3200 	9'	90 – 155 mph 116 – 200 mph (12.8/-15.1) – (38.0/-44.9)	Yes ³	No	No
	16'	90 – 155 mph 116 – 200 mph (12.3/-13.9) – (37.0/-41.0)	Yes ³	No	No
	18'	90 – 155 mph 116 – 200 mph (12.3/-13.9) – (37.0/-40.6)	Yes ³	Yes	No
Miami-Dade		N/A	N/A	N/A	N/A

¹ Based on ASCE7-05

² Based on ASCE7-10

³ Option available on select models.



Long Panel design with Thames DecraTrim windows in Walnut

AMARR HERITAGE

Tradition never goes out of style. Choose from four different panel designs to create the steel garage door you always wanted.

The Amarr Heritage collection features low-maintenance, heavy gauge steel doors in your choice of traditional styles.

Great looks for years to come.

Short Panel design with Prairie DecraTrim windows in True White



Short Panel with Cascade DecraTrim (SP23)




Flush Panel (FP)*




Short Panel with Waterford DecraTrim (SP25)



Ribbed Panel (RP)*



Long Panel with Moonlite DecraTrim (LP24)



DESIGNS

Also available in 2" 24-ga carriage house designs, see page 9.

Short Panel

HR1000
Single-Layer:
Steel

Long Panel

HR2000
Double-Layer:
Steel + Insulation

Flush Panel*

HR3000
Triple-Layer:
Steel + Insulation + Steel

Ribbed Panel*

HR3000
R-VALUE
9.05

*Available in Amarr Heritage HR3000 only

Decorative Windows

Choose from DecraTrim window inserts to coordinate with your home. See page 14 for all window options.

COLORS

Actual paint colors may vary from samples shown. Amarr steel doors are pre-painted; for custom colors, exterior latex paint must be used.

True White

Almond

Sandtone

Dark Brown

Golden Oak†

Walnut†

Mahogany†

†Price upcharge applies

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635 lbs.	Door Width Up To	Wind Load Approved for Wind Speeds Ranging MPH ¹ /MPH ² (PSF Design Pressures)	Impact Resistant	Glass Available	
				Standard	Impact
Amarr Heritage HR3000 	9'	90 – 155 mph 120 – 200 mph (14.3/-16.9) – (38.0/-45.0)	Yes ³	SP, LP ³	SP ³ , LP ³
	16'	90 – 155 mph 117 – 200 mph (14.1/-14.1) – (36.4/-41.4)	Yes ³	SP, LP ³	SP ³ , LP ³
	18'	90 – 155 mph 116 – 200 mph (12.2/-13.8) – (37.0/-40.6)	Yes ³	SP ³ , LP ³	SP ³ , LP ³
Miami-Dade	9'	189 mph 245 mph (57.0/-67.5)	Yes	No	SP, LP
	16'	175 mph 224 mph (48.0/-52.0)	Yes	No	SP ³ , LP ³
	18'	165 mph 212 mph (42.0/-46.0)	Yes	No	SP, LP
Amarr Heritage HR1000 and HR2000 	9'	90 – 169 mph 123 – 214 mph (14.3/-16.0) – (45.3/-51.2)	Yes ³	SP ³ , LP ³	SP ³
	16'	90 – 156 mph 116 – 202 mph (12.3/-13.9) – (38.0/-42.0)	Yes ³	SP ³ , LP ³	SP ³
	18'	90 – 155 mph 116 – 200 mph (12.2/-13.8) – (37.0/-40.6)	Yes ³	SP ³ , LP ³	SP ³
Miami-Dade	9'	169 – 189 mph 214 – 244 mph (45.3/-51.2) – (57.0/-67.0)	Yes	No	SP ³
	16'	156 – 185 mph 202 – 239 mph (38.0/-42.0) – (47.5/-52.0)	Yes	No	SP ³
	18'	165 – 180 mph 212 – 232 mph (42.0/-46.0) – (48.6/-55.0)	Yes	No	SP ³

¹ Based on ASCE7-05

² Based on ASCE7-10

³ Option available on select models.

STEEL



Long Panel design in True White

AMARR LINCOLN

Exceptional value: Energy efficient, 2" thick traditional style garage doors with conventional hardware at competitive prices.

Short Panel design with Cascade DecraTrim windows in Sandtone



Flush Panel (FP)*



Ribbed Panel (RP)*



Long Panel with Stockton DecraTrim (LP20)



Short Panel (SP)




Short Panel with Stockton DecraTrim (SP20)




DESIGNS

Short Panel




Long Panel



Flush Panel*



Ribbed Panel*



*Available in Amarr Lincoln LI3000 only

LI1000
Single-Layer:
Steel

LI2000
Double-Layer:
Steel + Insulation

LI3000
Triple-Layer:
Steel + Insulation + Steel

LI3000
R-VALUE
9.05

Decorative Options

Choose DecraTrim window inserts to coordinate with your home's design. See page 14 for all window options.

COLORS

Actual paint colors may vary from samples shown. Amarr steel doors are pre-painted; for custom colors, exterior latex paint must be used.



†Price upcharge applies

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635 lbs.	Door Width Up To	Wind Load Approved for Wind Speeds Ranging MPH/MPH ² (PSF Design Pressures)	Impact Resistant	Glass Available	
				Standard	Impact
Amarr Lincoln LI3000 Lifetime Limited Warranty	9'	90 – 155 mph 123 – 200 mph (14.3/-16.9) – (38.0/-45.0)	Yes ³	SP, LP ³	SP ³ , LP ³
	16'	90 – 155 mph 123 – 200 mph (12.3/-13.9) – (36.4/-41.4)	Yes ³	SP, LP ³	SP ³ , LP ³
	18'	90 – 155 mph 123 – 200 mph (12.2/-13.8) – (36.1/-40.8)	Yes ³	SP ³ , LP ³	SP ³ , LP ³
Miami-Dade		N/A	N/A	N/A	N/A
Amarr Lincoln LI1000 and LI2000 15-Year Limited Warranty 25-Year Limited Warranty	9'	90 – 130 mph 116 – 168 mph (12.8/-15.1) – (26.7/-31.6)	No	SP, LP	No
	16'	90 – 130 mph 116 – 168 mph (12.3/-13.9) – (25.6/-29.1)	No	SP, LP	No
	18'	90 – 130 mph 116 – 168 mph (12.2/-13.8) – (25.4/-28.0)	No	SP, LP	No
Miami-Dade		N/A	N/A	N/A	N/A

¹ Based on ASCE7-05

² Based on ASCE7-10

³ Option available on select models.

STEEL



Short Panel design in Terratone

AMARR STRATFORD

Time-honored style. The Amarr Stratford collection offers 4 traditional designs, 11 color choices, and 21 decorative window options. This durable low-maintenance collection provides section interfaces designed to reduce the risk of serious finger and hand injuries. The Amarr Stratford collection. A statement of style.

Long Panel design with Sunray DecraTrim windows in Santone



Short Panel with Wagon Wheel DecraTrim (SP26)



Ribbed Panel (RP)*



Long Panel with Arched Thames DecraTrim (LP31)



Short Panel with Stockton DecraTrim (SP20)



Flush Panel (FP)*



DESIGNS

Short Panel

ST1000
Single-Layer:
Steel

Long Panel

ST2000
Double-Layer:
Steel + Insulation

Flush Panel*

ST3000
Triple-Layer:
Steel + Insulation + Steel

Ribbed Panel*

ST3000
R-VALUE
6.48

*Available in Amarr Stratford ST3000 only

Decorative Options
Choose from DecraTrim window inserts to coordinate with your home. See page 14 for all window options.

COLORS

Actual paint colors may vary from samples shown. Amarr steel doors are pre-painted; for custom colors, exterior latex paint must be used.

True White

Almond

Wicker Tan

Sandtone

Terratone

Dark Brown

Hunter Green†

Gray†

Golden Oak‡

Walnut‡

Mahogany‡

†Available in Amarr Stratford ST3000 only
‡Price upcharge applies

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635 lbs.	Door Width Up To	Wind Load Approved for Wind Speeds Ranging MPH/MPH ² (PSF Design Pressures)	Impact Resistant	Glass Available	
				Standard	Impact
Amarr Stratford ST3000 	9'	90 – 140 mph 120 – 177 mph (14.3/-16.9) – (31.0/-35.1)	Yes ³	SP, LP ³	SP, LP ³
	16'	90 – 143 mph 117 – 183 mph (14.1/-14.1) – (33.0/-34.6)	Yes ³	SP, LP ³	SP, LP ³
	18'	90 – 155 mph 116 – 200 mph (12.2/-13.8) – (37.0/-40.6)	Yes ³	SP ² , LP ³	SP, LP ³
Miami-Dade		N/A	N/A	N/A	N/A
Amarr Stratford ST1000 and ST2000 	9'	90 – 169 mph 123 – 214 mph (14.3/-16.9) – (45.3/-51.2)	Yes ³	SP ² , LP ³	SP ³
	16'	90 – 155 mph 116 – 200 mph (12.3/-13.9) – (38.0/-42.0)	Yes ³	SP ² , LP ³	SP ³
	18'	90 – 155 mph 116 – 200 mph (12.2/-13.8) – (37.0/-40.6)	Yes ³	SP ² , LP ³	SP ³
Miami-Dade	16'	156 mph 202 mph (38.0/-42.0)	Yes	No	SP ³

¹ Based on ASCE7-05 ² Based on ASCE7-10 ³ Option available on select models.

STEEL OPTIONS

AMARR CLASSICA TOP SECTIONS

Design visibility varies due to lighting.

Closed Arch • Available for Tuscany (T1), Santiago (S1), Lucern (L1), Valencia (V1), Cortona (C1)



Closed Arch • Northampton (N1)



Closed Square • Cortona (C2)



Rhine (7)*



Closed Square • Available for Tuscany (T2), Santiago (S2), Lucern (L2), Valencia (V2)



Closed Square • Northampton (N2)



Danube (4)*



Seine (8)*



Closed Double Arch • Available for Tuscany (T1D), Santiago (S1D), Lucern (L1D), Valencia (V1D), Cortona (C1D)



Closed Arch • Bordeaux (B1)



Madeira (5)*



Thames (10)*



Closed Square • Bordeaux (B2)



Nile (6)*



Obscure (0)



*Designs available with Obscure glass

AMARR CARRIAGE COURT TOP SECTIONS

FOR DESIGNS AVAILABLE WITH WINDOWS

Available for Laurelbay, Pinetop, Bradberry, Kensington, Seabrook and Rosemont with Double-strength, Obscure or Insulated glass:

Closed Square (104)



Clear Square (115)



3 Lite Square (106)



4 Lite Square (107)



6 Lite Square (112)



8 Lite Square (113)



Closed Arch (105)



Clear Arch (114)



3 Lite Arch (110)



4 Lite Arch (111)



6 Lite Arch (108)



8 Lite Arch (109)



Available for Ashley, Charlton, Fairfield, Middleton, Greenbriar, Darby, Newberry, Tanglewood, Arcadia*, Ravenood*, Brookland*, and Magnolia*:

Closed Square (104)



Closed Arch (105)



*Closed Square Only

FOR DESIGNS NOT AVAILABLE WITH WINDOWS

DECRA TRIM WINDOW INSERTS

Available with Clear or Obscure Glass.

SHORT PANEL

Short Panel DecraTrim inserts available for Heritage, Stratford, and Lincoln collections.

Clear (C)



Prairie (21)



Waterford (25)



Full Sunray (28)



Obscure (O)



Cathedral (22)



Wagon Wheel (26)



Stockton (20)



Cascade (23)



Sunray (27)



Five Piece Sunray (29) for 10' in True White only

LONG PANEL

Long Panel DecraTrim inserts available for Heritage, Stratford, Lincoln, Oak Summit, and Hillcrest collections.

Clear (C)



Prairie (21)



Moonlite (24)



Sunray (27)



Full Sunray (28)



Obscure (O)



Cathedral (22)



Waterford (25)



Thames (30)



Stockton (20)



Cascade (23)



Wagon Wheel (26)



Arched Thames (31)



DECORATIVE HARDWARE

ALUMINUM

Available for Amarr Carriage Court, Classica, Hillcrest, Oak Summit, Designer's Choice, and Coastal collections.

9" Handles



18" Strap Hinges With Clavost†



11" L-Hinge With Clavost



VERSAILLES

10½" Handles



17" Strap Hinges With Clavost†



3½" Ring Handles



CANTERBURY

†Hinges with Clavos not recommended for arched openings

STAMPED STEEL

Available for Amarr Carriage Court, Classica, Hillcrest, Oak Summit, Designer's Choice, and Coastal collections.

11" Handles



16" Strap Hinges



11" Handles



BLUE RIDGE

AMARR LOCK

Available for Amarr Lincoln, Olympus, Heritage, and Stratford collections

ALPINE

MAGNETIC ABS VINYL

Available for Amarr Carriage Court, Classica, Hillcrest, Oak Summit, Designer's Choice, and Coastal collections.

12" Handles



16" Strap Hinges



11" Handles



18" Strap Hinges



CASTLE ROCK

MAPLE CREEK

†2-sided adhesive disks must be purchased separately



Terry design with studs and R.H. Hunt gate latch (custom stain by homeowner)


AMARR BY DESIGN AD4000

Meticulously handcrafted for reliable performance.


These all-natural wood doors add striking beauty and value to your home. Unlimited custom designs available.

DESIGNS

Unlimited design options.

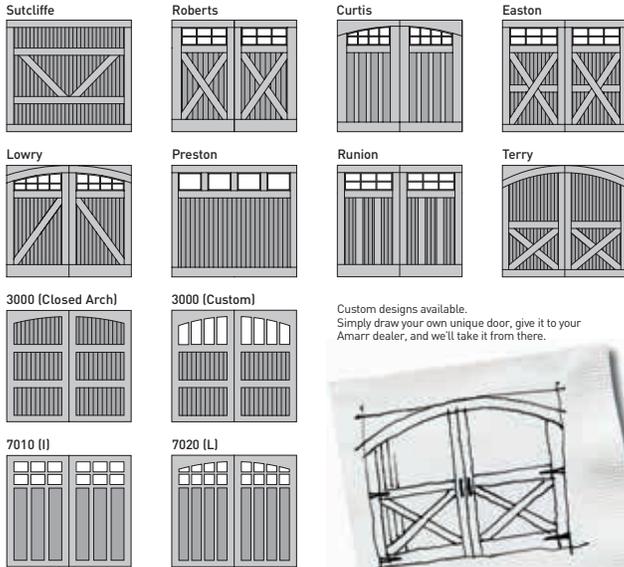

Custom designs available. Simply draw your own unique door, give it to your Amarr dealer, and we'll take it from there.



AD4000
Triple-Layer:
Wood + Insulation + Wood

AD4000
R-VALUE
9.00



WIND LOAD APPROVALS

Exposure B with mean roof height < 30'	Door Width Up To	Wind Load Approved for Wind Speeds Ranging MPH/MPH ² (PSF Design Pressures)	Impact Resistant	Glass Available	
				Standard	Impact
Amarr by Design AD4000 1-Year Limited Warranty	10'	142 – 176 mph 194 – 229 mph (37.0/-37.0) – (50.0/-57.0)	Yes ³	Yes	Yes ³
	16'	158 mph 205 mph (40.0/-43.0)	Yes ³	Yes	No
	18'	111 – 159 mph 144 – 207 mph (21.0/-21.0) – (43.0/-43.0)	Yes ³	Yes	Yes ³
Miami-Dade ⁴ <small>Doors are available up to 14' tall or a max weight of 635 lbs.</small>	9'	169 – 185 mph 214 – 240 mph (45.3/-51.2) – (50.0/-62.0)	Yes	No	No
	16'	169 mph 218 mph (45.8/-49.3)	Yes	No	No
	18'	165 mph 212 mph (42.0/-46.0)	Yes	No	No

¹ Based on ASCE7-05

² Based on ASCE7-10

³ Option available on select models.

⁴ Miami-Dade wood doors require wood-on-steel base construction.

WOOD CHOICES

Other types of wood available upon request. Doors shipped natural.

Clear Vertical Grain Cedar



Incense Cedar



Red Grandis



Mahogany






Clear Anodized frame with Obscure glass windows

AMARR VISTA VI1000

It's the perfect reflection of your style. The modern industrial look goes residential with the introduction of the Amarr Vista collection. From the outside, these sleek doors perfectly mirror the clean lines and glass expanses of your home's contemporary design. Inside, they transform your garage into a bright and inviting room.

DESIGNS

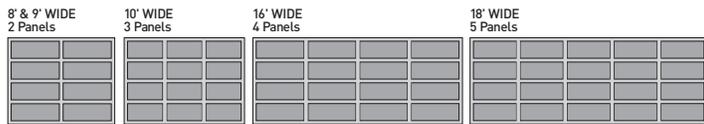

COLORS

Actual paint colors may vary from samples shown.

ANODIZE FINISHES



*Special order; longer lead time and price upcharge apply.

PAINT FINISHES (PVDF AND POWDER COAT)



RAL and custom powder coat colors available.

†PVDF only; longer lead time and price upcharge apply.

GLASS

Glass is tempered and available as single pane or insulated.



*Laminated, not tempered. †Insulated glass not available.

OPTIONAL PANELS



Shown in Clear Anodized.

0.312" square perforations on 1/2" centers. Also available in Mill finish.

6 columns of 12) 3"x 3/4" vents on a 4' x 24" panel. Shown in White Powder Coat

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635 lbs.	Door Width Up To	Wind Load Approved for Wind Speeds Ranging MPH/MPH ² (PSF Design Pressures)	Impact Resistant	Glass Available	
				Standard	Impact
Amarr Vista VI1000 5-Year Limited Warranty	9'	140 mph 180 mph (28.0/-33.1)	No	Yes	No
	12'	90 - 135 mph 116 - 175 mph (11.4/-13.1) - (26.8/-33.1)	No	Yes	No
	16'	110 - 130 mph 116 - 168 mph (16.7/-18.9) - (23.5/-26.7)	No	Yes	No
Miami-Dade		N/A	N/A	N/A	N/A

¹ Based on ASCE7-05

² Based on ASCE7-10



Nantucket design in White with decorative Versailleurs handles, hinges and clavos

AMARR COASTAL


Timeless beauty in its element. No matter where you live, the Amarr Coastal collection made with resilient vinyl, seals out the elements and resists dents and rust. No warping, rotting, splitting or cracking.

Classic carriage house and traditional designs for years of maintenance-free performance. It's a beautiful thing.


DESIGNS

TRADITIONAL


Hampton





Gulfport



CARRIAGE HOUSE Available with windows



Not available with windows



CO3000

Triple-Layer:
Vinyl + Insulation + ABS

CO3000
R-VALUE
8.16

COLORS

Actual color may vary from sample shown.



UV Resistant
White

Hatteras design in White with Blue Ridge handles



WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635 lbs.	Door Width Up To	Wind Load Approved for Wind Speeds Ranging MPH/MPH ² (PSF Design Pressures)	Impact Resistant	Glass Available	
				Standard	Impact
Amarr Coastal CO3000 ³	10'	150 mph 194 mph (40.0/-40.0)	No	Yes	No
	16'	109 mph 141 mph (20.0/-20.0)	No	Yes	No
Miami-Dade		N/A	N/A	N/A	N/A

¹ Based on ASCE7-05

² Based on ASCE7-10

³ Not Florida approved.

Lifetime
Limited Warranty

WIND LOAD DESIGN PRESSURES (PSF)

Exposure B with a mean roof height < 30'

ASCE 7-05 Wind Speed	90 MPH	110 MPH	130 MPH	155 MPH	180 MPH	
ASCE 7-10 Wind Speed (Florida)		142 MPH	168 MPH	200 MPH	232 MPH	DADE
DOOR WIDTH						
UP to 9'	12.8 / -15.1 psf	19.1 / -22.6 psf	26.7 / -31.6 psf	38.0 / -44.9 psf	51.1 / -60.3 psf	45.3 / -51.2 psf
10' to 16'	12.3 / -13.9 psf	18.3 / -20.8 psf	25.6 / -29.1 psf	36.4 / -41.4 psf	49.1 / -55.8 psf	45.8 / -49.3 psf
18'	12.2 / -13.8 psf	18.2 / -20.6 psf	25.4 / -28.7 psf	36.1 / -40.8 psf	48.6 / -55.0 psf	42.0 / -46.0 psf

STEEL SPECIFICATIONS

	CARRIAGE HOUSE DESIGN												TRADITIONAL DESIGN									
	AMARR CARRIAGE COURT CC4000	AMARR CLASSICA CL1000	AMARR CLASSICA CL2000	AMARR CLASSICA CL3000	AMARR OAK SUMMIT OS1000	AMARR OAK SUMMIT OS2000	AMARR OAK SUMMIT OS3000	AMARR HILLCREST HI1000	AMARR HILLCREST HI2000	AMARR HILLCREST HI3000	AMARR DESIGNER'S CHOICE DC3200	AMARR HERITAGE HR1000	AMARR HERITAGE HR2000	AMARR HERITAGE HR3000	AMARR STRATFORD ST1000	AMARR STRATFORD ST2000	AMARR STRATFORD ST3000	AMARR LINCOLN LI1000	AMARR LINCOLN LI2000	AMARR LINCOLN LI3000	AMARR OLYMPUS OL3200	
PANEL DESIGNS [Safe Guard]		✓	✓	✓	✓	✓	✓							✓	✓	✓	✓	✓	✓	✓	✓	✓
Short														•	•	•	•	•	•	•	•	•
Long														•	•	•	•	•	•	•	•	•
Flush																						
Ribbed																						
Carriage House	18 Designs	7 Designs	7 Designs	7 Designs	4 Designs	4 Designs	4 Designs	4 Designs	4 Designs	4 Designs	4 Designs											
CONSTRUCTION LAYERS	4	1	2	3	1	2	3	1	2	3	3	1	2	3	1	2	3	1	2	3	3	
Steel		•			•			•				•			•			•			•	
Steel + Insulation			•			•			•				•			•			•			•
Steel + Insulation + Steel				•			•			•	•					•				•		•
Overlay + Steel + Insul. + Steel	•																					
DOOR THICKNESS	2" (5.1cm)	2" (5.1cm)	2" (5.1cm)	2" (5.1cm)	2" (5.1cm)	2" (5.1cm)	1 3/8" (3.5cm)	2" (5.1cm)	2" (5.1cm)	2" (5.1cm)	2" (5.1cm)	2" (5.1cm)	2" (5.1cm)	2" (5.1cm)	2" (5.1cm)	2" (5.1cm)	1 3/8" (3.5cm)	2" (5.1cm)	2" (5.1cm)	2" (5.1cm)	2" (5.1cm)	
INSULATION	Polystyrene ¹		Polystyrene ¹	Polyurethane ¹		Polystyrene ¹	Polystyrene ¹		Polystyrene ¹	Polystyrene ¹	Polyurethane		Polystyrene ¹	Polystyrene ¹		Polystyrene ¹	Polystyrene ¹		Polystyrene ¹	Polystyrene ¹	Polyurethane	
R-VALUE²	6.48		6.64	13.35		6.64	6.48		6.64	9.05	19.40 [†] /13.35 ^{**}		6.64	9.05		6.64	6.48		6.64	9.05	19.40 [†] /13.35 ^{**}	
STEEL THICKNESS																						
Gauge (ga)	27/27 ga	24 ga	24 ga	25/27 ga	25 ga	25 ga	27/27 ga	25 ga	25 ga	27/27 ga	27/27 ga	24 ga	24 ga	24/27 ga	25 ga	25 ga	27/27 ga	25 ga	25 ga	27/27 ga	27/27 ga	
Gauge (mm)	0.42/0.42mm	0.61mm	0.61mm	0.53/0.42mm	0.53mm	0.53mm	0.42/0.42mm	0.53mm	0.53mm	0.42/0.42mm	0.42/0.42mm	0.61mm	0.61mm	0.61/0.42mm	0.53mm	0.53mm	0.42/0.42mm	0.53mm	0.53mm	0.42/0.42mm	0.42/0.42mm	
THERMAL SEAL	•						•				•			•			•				•	•
EXTERIOR COLOR OPTIONS																						
True White	• ³	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Almond	• ³	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Wicker Tan	• ³	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Sandtone	• ³	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Terratone		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Dark Brown		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Hunter Green							•											•				
Gray							•											•				
Black											•											•
Golden Oak		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Walnut		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Mahogany		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
WARRANTY																						
Paint Finish ⁴	Lifetime	Lifetime	Lifetime	Lifetime	15 Years	25 Years	Lifetime	15 Years	25 Years	Lifetime	Lifetime	Lifetime	Lifetime	Lifetime	15 Years	25 Years	Lifetime	15 Years	25 Years	Lifetime	Lifetime	
Workmanship/Hardware ⁴	5 Years	3 Years	5 Years	Lifetime	1 Year	2 Years	3 Years	1 Year	2 Years	3 Years	Lifetime	3 Years	5 Years	Lifetime	1 Year	2 Years	3 Years	1 Year	2 Years	3 Years	Lifetime	



¹ Insulation on Amarr brand doors has passed self-ignition, flamespread, and smoke developed index fire testing.

² Calculated door section R-value is in accordance with DASMA TDS-163.
^A Based on independent laboratory test results.

³ With White Overlay

⁴ For complete warranty details, visit amarr.com or contact your local Amarr dealer.

* True White Bead Board only.
^{**} All other panels and colors except True White Bead Board
[†] True White Short Panel only.
[‡] All other panels and colors except True White Short Panel

NOTE: Optional door locks and various heights and widths are available thru your local garage door dealer.

WIND LOAD AVAILABILITY

Exposure B with a mean roof height < 30'

ASCE 7-05 Wind Speed	90 MPH ¹	110 MPH ¹	130 MPH ¹	155 MPH ¹	180 MPH ¹	DADE ²	IMPACT RESISTANT ¹	STANDARD GLASS ¹		IMPACT GLASS ¹		COLORS
	ASCE 7-10 Wind Speed (Florida)	142 MPH ¹	168 MPH ¹	200 MPH ¹	232 MPH ¹			SHORT PANEL	LONG PANEL	SHORT PANEL	LONG PANEL	
Amarr Carriage Court CC4000	•	•	•	•	•	•	•	•	•	•	•	W1, A1, K1, S1
Amarr Classica CL3000	•	•	•	•	•	•	•	•	•	•	•	TW, AL, WK, ST, TT, DN, OK, NT, MY
Amarr Classica CL1000 / CL2000	•	•	•	•	•	•	•	•	•	•	•	TW, AL, WK, ST, TT, DN, OK, NT, MY
Amarr Oak Summit OS3000 (1-3/8" / 27-ga)	•	•	•	•	•	•	•	•	•	•	•	TW, AL, WK, ST, TT, DN, HG, GY, OK, NT, MY
Amarr Oak Summit OS1000 / OS2000 (2" / 25-ga)	•	•	•	•	•	•	•	•	•	• ²	•	TW, AL, WK, ST, TT, DN, OK, NT, MY
Amarr Oak Summit OS3200 (2" / 24-ga)	•	•	•	•	•	•	•	•	•	•	•	TW, AL, ST, DN, OK, NT, MY
Amarr Oak Summit OS1200 / OS2200 (2" / 24-ga)	•	•	•	•	•	•	•	•	•	• ²	•	TW, AL, ST, DN, OK, NT, MY
Amarr Hillcrest HI3000	•	•	•	•	•	•	•	•	•	•	•	TW, AL, WK, ST, TT, DN, OK, NT, MY
Amarr Hillcrest HI1000 / HI2000	•	•	•	•	•	•	•	•	•	•	•	TW, AL, WK, ST, TT, DN, OK, NT, MY
Amarr Designer's Choice DC3200	•	•	•	•	•	•	•	•	•	•	•	TW, AL, WK, ST, DN, BL
Amarr Heritage HR3000	•	•	•	•	•	•	•	•	•	•	•	TW, AL, ST, DN, OK, NT, MY
Amarr Heritage HR1000 / HR2000	•	•	•	•	•	•	•	•	•	•	•	TW, AL, ST, DN, OK, NT, MY
Amarr Stratford ST3000	•	•	•	•	•	•	•	•	•	•	•	TW, AL, WK, ST, TT, DN, HG, GY, OK, NT, MY
Amarr Stratford ST1000 / ST2000	•	•	•	•	•	•	•	•	•	•	•	TW, AL, WK, ST, TT, DN, OK, NT, MY
Amarr Lincoln LI3000	•	•	•	•	•	•	•	•	•	•	•	TW, AL, WK, ST, TT, DN, OK, NT, MY
Amarr Lincoln LI1000 / LI2000	•	•	•	•	•	•	•	•	•	•	•	TW, AL, WK, ST, TT, DN, OK, NT, MY
Amarr Olympus OL3200	•	•	•	•	•	•	•	•	•	•	•	TW, AL, WK, ST, DN, BL
Amarr by Design AD4000	•	•	•	•	•	•	•	•	•	•	•	UNFINISHED WOOD
Amarr Vista VI1000	•	•	•	•	•	•	•	•	•	•	•	ANODIZE, PVDF & POWDER COAT FINISHES
Amarr Coastal C03000	•	•	•	•	•	•	•	•	•	•	•	WHITE

¹ Available on select models and select door widths. Check detailed Wind Load Approval chart for each product collection.
² Short panel impact windows and panels are slightly misaligned by no more than 1.54"; returns and replacements not accepted. To see detailed drawing, contact engineeringdept@amarr.com.
 Note: Check with local municipalities for specific building requirements for your location.

WOOD SPECIFICATIONS

	AMARR BY DESIGN AD4000
PANEL DESIGNS	
Carriage House	Unlimited Designs
CONSTRUCTION*	
Wood + Insulation + Wood	•
DOOR THICKNESS	3" (7.6cm)
R-VALUE	9.0
WOOD BASEPLY OPTIONS	
5/8" MDO Plywood (paint grade only)	•
1/2" Marine Grade Plywood	•
5/8" Incense Cedar	•
5/8" Clear Vertical Grain Cedar	•
5/8" Red Grandis	•
5/8" Mahogany	•
Other materials available upon request	•
TRIM OVERLAY OPTIONS	
5/8" Moisture-and Rot-resistant	•
Extira Exterior Panel (paint grade only)	•
5/8" Incense Cedar	•
5/8" Clear Vertical Grain Cedar	•
5/8" Red Grandis	•
5/8" Mahogany	•
Other materials available upon request	•
OPTIONAL WOOD DISTRESSING	•
SECTION HEIGHT OPTIONS	18", 21", 28" or 32"
POLYSTYRENE INSULATION (1 3/8" thick)	•
DECORATIVE WINDOW OPTIONS	
1/8" (0.32cm) Double Strength	•
Insulated	•
FIRE RATED DOORS AVAILABLE¹	•
SECTION WARRANTY²	1 Year

*Optional: Wood-on-steel section construction is available. Some wind load pressures may require wood-on-steel construction.

¹ Optional: Special-designed doors meet guidelines for CA Building Codes for use in Wildlife Urban Interface (WUI). Fire-rated doors with insulated and tempered glass windows available.

² For complete warranty details, visit amarr.com or contact your local Amarr dealer.

Doors are shipped natural. Priming is available for paint grade doors. All doors require finishing on all six (6) sides of each section within two days of receipt of door(s) and prior to installation. Visit amarr.com for finishing recommendations.

ALUMINUM SPECIFICATIONS

	AMARR VISTA VI1000
FRAME CONSTRUCTION	2" thick aluminum
SECTION HEIGHTS	21" and 24"; 18" for odd height doors
COLORS	
Anodize	Clear, Champagne, Copper, Medium Bronze, Dark Bronze, Black
Paint	26 standard PVDF colors, 21 standard Powder Coat colors, RAL and custom colors in both PVDF and Powder Coat
Mill	Perforated panel only
GLASS	
Transparent	Clear, Obscure, ThermoPro Low-E
Opaque	Frost, Snow, Whiteout
Tint	Gray, Bronze, Green
OPTIONAL PANELS	Full View, Aluminum, Insulated Aluminum, Louvered, Perforated
FINISH WARRANTY¹	5 Years
WORKMANSHIP WARRANTY¹	5 Years
HARDWARE WARRANTY¹	5 Years

¹ For complete warranty details contact your local Amarr dealer.

VINYL SPECIFICATIONS

	AMARR COASTAL C03000
CONSTRUCTION	Vinyl + Insulation + ABS
DOOR THICKNESS	1 7/16"
R-VALUE	8.16
GLASS OPTIONS	1/8" Clear DSB (Standard), Clear Tempered, Insulated Tempered, Obscure, Insulated Obscure, Insulated
WIDTHS AVAILABLE¹	8', 9', 10', 16', 18'
HEIGHTS AVAILABLE¹	6'6", 7', 7'6", 8'
SECTION WARRANTY²	1 Year
FINISH WARRANTY²	Lifetime
HARDWARE WARRANTY²	3 Years

¹ Custom widths and heights available. Upcharge applies.

² For complete warranty details contact your local Amarr dealer.

Fairfield design with Closed Square in True White/White with Alpine decorative handles



Our Philosophy. Since 1951, we have successfully raised the standards of quality, value, and dependability in the garage door industry. Today, with the same promise of individual attention and great value for all our customers, we remain committed to offering Amarr garage doors and services that raise those standards even higher.

Visit amarr.com for additional products and a full line of Amarr commercial sectional, rolling sheet, and rolling steel doors.

Your Local Amarr Dealer:

Entrematic

165 Carriage Court
Winston-Salem, NC 27105
800.503.DOOR
www.amarr.com



Entrematic, Amarr, Classica, Heritage, Stratford, and Oak Summit as words and logos are trademarks owned by Entrematic Group AB or companies within the Entrematic Group.

Technical data subject to change without notice.

Sectional door products from Entrematic may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents.

©Entrematic Group AB 2016. All rights reserved.
Printed in USA Form # 6680716/8M/GVS

ENTRE/MATIC

